

***Temtop***

**Elitech Technology, Inc (US)**

1551 McCarthy Blvd, Suite 112

Milpitas, CA 95035

[www.elitechustore.com](http://www.elitechustore.com)

[sales@elitechus.com](mailto:sales@elitechus.com)

Made in China


## 1. Overview

The detector can accurately detect indoor air quality. The laser particle sensor allows it to directly transform air pollutant concentration into visual data, so as to provide air quality alert and effectively safeguard your family.

## 2. Application

At home, office and cab, etc.

## 3. Appearance

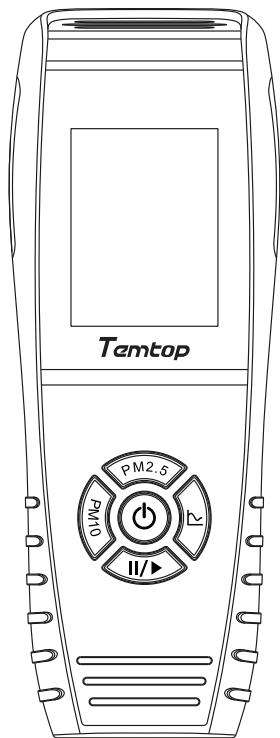

## 4. Specifications

- Name: Laser Particle Detector
- Model: P600
- Display: TFT color LCD screen
- Power: 3.7VDC
- Dimensions: 177\*65.5\*32 mm
- Power adapter:  
Output voltage: 5VDC, output current: 1A
- Operating environment:  
Temperature range: 0-50℃  
Humidity range: 0-90%RH  
Air pressure: 1atm
- Measurement range:  
PM2.5/PM10: 0-999ug/m<sup>3</sup>, resolution: 1ug/m<sup>3</sup>



## Health standard index

Leve Pollutant	Good	Normal	Danger
PM2.5	< 15	15~65	> 65



## 5. Operation



### 1) On/Off

Press and hold power button  for 2 seconds to turn on the detector. Press and hold  for 2 seconds to turn off the detector, or keep it inactive for 1 hour, it will switch off automatically (Auto off function is disabled in curve display interface).

### 2) Detection

Place the detector in the target environment, and it will automatically detect PM2.5 and PM10 concentration.

### 3) Power indication


 : Battery is full  
 : Battery is low. Please charge.

### 4) Buttons

PM2.5 button: Press it to display PM2.5 concentration and its level.

PM10 button: Press it to display PM10 concentration.

 : Press it display PM2.5 concentration in curve.

 : Press it in running mode, the detector holds currently displayed data. Press it again, the detector continues detection and displays real-time data.

## 6. Notice

- The detector features a sensor using laser detection principle, please keep it away from substances like fluff and hair to guarantee the accuracy of measured data.
- Please do not place the detector in the environment where particle concentration is more than 500ug/m3 for long time. Long-time exposure to high-concentration air pollutants will damage the sensor and make it work improperly.
- Avoid using the detector in humid environment to ensure the accuracy of measured data.
- Please do not bump, strike or drop the detector.
- Please do not cover the detection port or air outlet during use.
- Avoid cross interference.

## 7. Troubleshooting

If...	Then...
Display error	Check the battery. If the problem still exists, please contact the service center.
Data error	Change a place and restart the detector. If the problem still cannot be solved, contact the service center.